
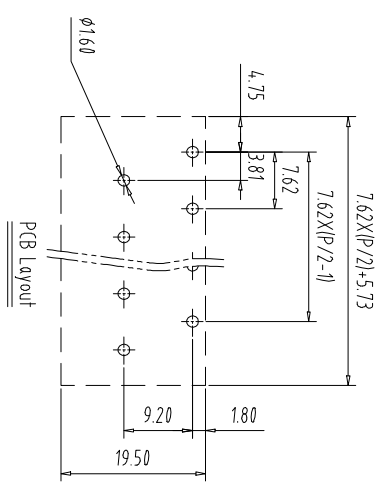

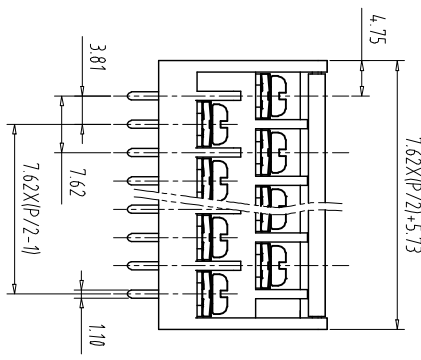



注：本图禁止传输、复制、编辑、修改，以及用其内容建设数据库。

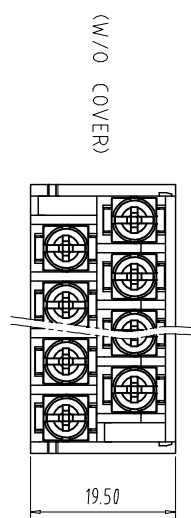

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

2. Torque value: M3, 4, 4.3Lb.in  
3. Wire range: 22~14AWG


IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	17.5A	/

- NOTES2:
- 1.Housing: PA66(UL94V-0)
  - 2.Solder Pin1: Copper alloy(Sn Plated)
  - 3.Solder Pin2: Copper alloy(Sn Plated)
  - 4.Screw: Steel(M3,Ni Plated)
  - 5.Cover: PC

- NOTES3:
- 1.Pitch: 7.62mm Poles: 2X(2-18)P
  - 2.Stripping length: 7-8mm
  - 3.Operating temperature: -40℃~+105℃
  - 4.RoHS Compliance

How to order  
MX24A - 7.62 - XXP - XXXX - X - X - X

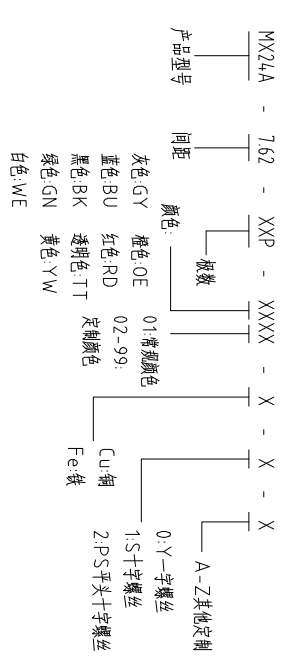

Pitch Range In mm	Nominal Dimension Range In mm					
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			NAME		
MAIXU 慈溪市迈旭电子有限公司			MX24A-7.62-XXP		
DWGNO.					