
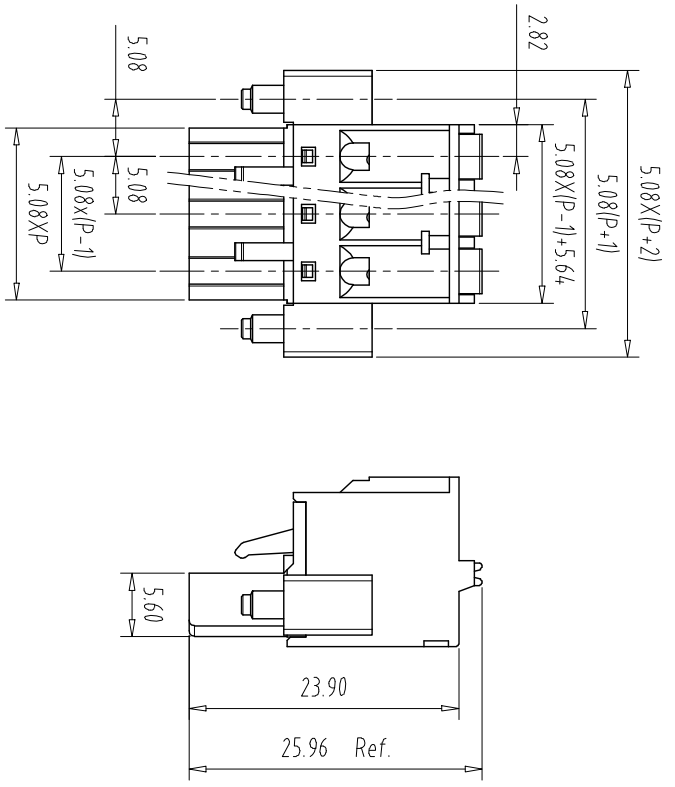


注: 本图仅供参考, 复制、编辑文档, 以及用其内容建设文档

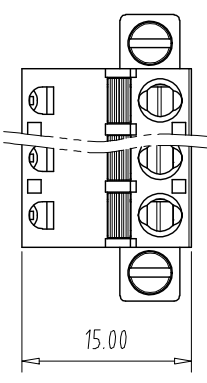

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:
UL Standard

Use group	B	C	D
Rated Current	10A	/	10A
Rated Voltage	300V	/	300V


1. Wire range: 28~12AWG
IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	/	4.0KV	/
Rate Voltage(V)	/	320V	/
Rate Current(A)	/	12A	/

2. wire range: 0.2~2.5mm²
NOTES:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Copper alloy (Ni Plated)
- 5.Spring: Stainless Steel
- 6.Screw: Steel (M2.5, Zn Plated)

NOTES:
1.Pitch: 5.08mm Poles: 02-24P
2.Stripping length: 9-10mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance
How to order

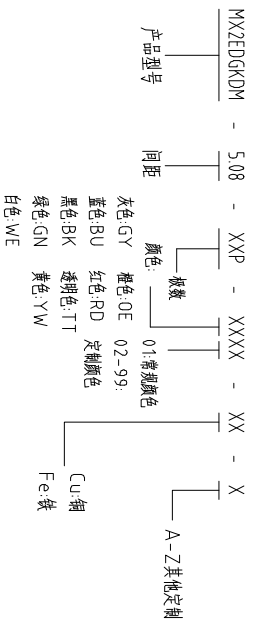

Pitch Range In mm	Nominal Dimension Range In mm					
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
						±1.30
						±2°

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司					NAME
MXZEDGKDM-5.08-XXP					DWGNO.