

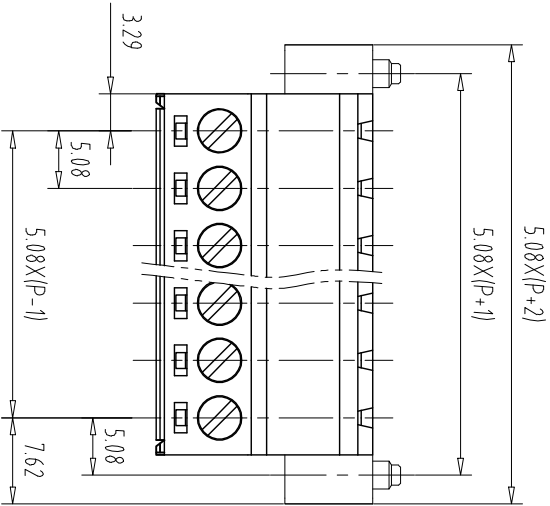


注：本资料禁止传输、复制、编辑、存档，以及用其内容进行建设性交流

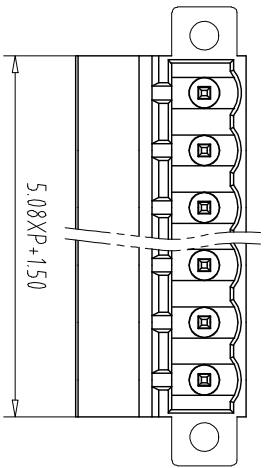

NOTES1:

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

UL Standard

1. Pollution Degree
2. Torque value: M2.5, 0.4Nm
3. Torque value: M2.5, 3.54Lb.in
4. Wire range: 28~12AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	4.0KV	/
Rate Voltage(V)	/	320V	/
Rate Current(A)	/	15A	/

2. Torque value: M2.5, 0.4Nm
3. wire range: 0.2~2.5mm²

NOTES2:


- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Screw: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating Temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX2EDGRKM - 508 - XXP - XXXX - XX - X - X

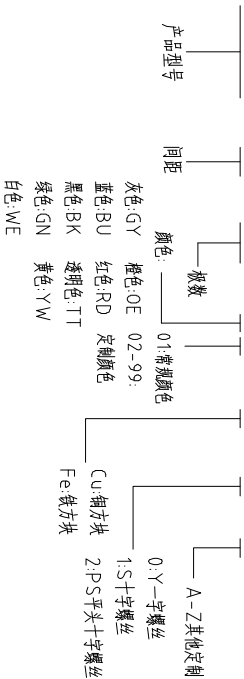

Pitch Range In mm	Nominal Dimension Range In mm					Tolerance	
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	MM	1:1
APP.	DATE		A4		
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司					NAME: MX2EDGRKM-5.08-XXP DWGNO.