
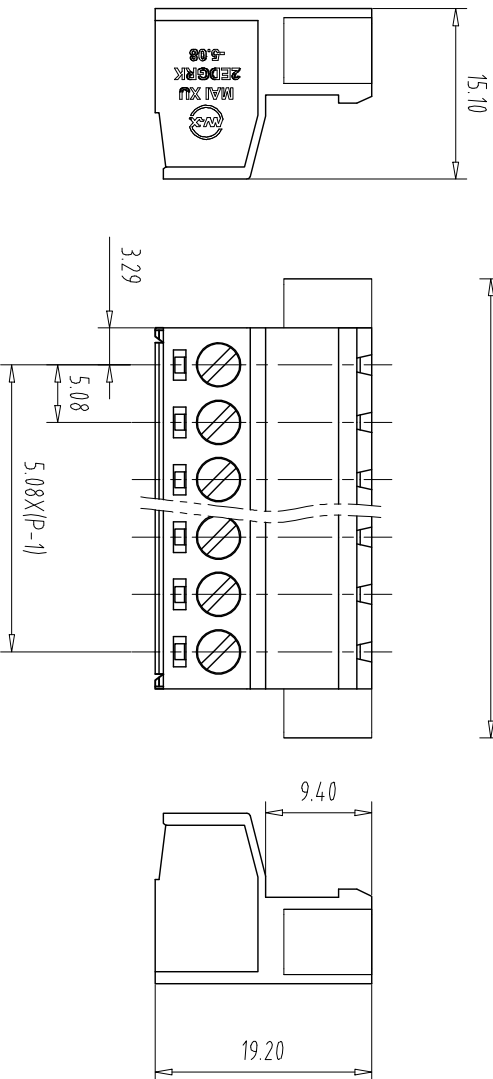


注：本图仅供参考，复制、编辑、修改、以及用其内容者均须依此

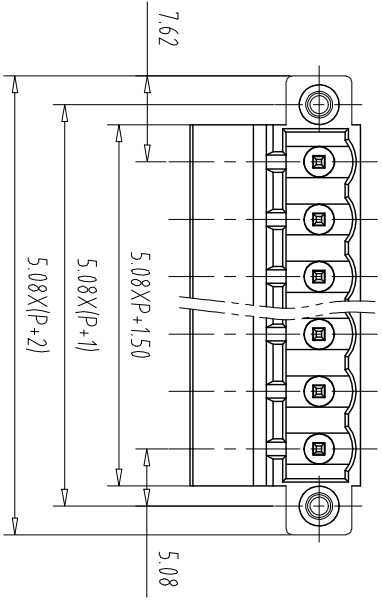

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
UL Standard

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

NOTES2:
1. Pollution Degree
2. Torque value: M2.5, 3.54Lb/in
3. Torque value: M2.5, 3.54Lb/in
4. Wire range: 28~12AWG
IEC Standard

1	2	3	2	2
Overvoltage Category	III	III	II	II
Rate Impulse Voltage(KV)	/	/	4.0KV	/
Rate Voltage(V)	/	/	320V	/
Rate Current(A)	/	/	15A	/

NOTES3:
1. Pitch: 5.08mm Poles: 02-24P
2. Stripping length: 7-8mm
3. Operating Temperature: -40℃~+105℃
4. RoHS Compliance

How to order
MX2EDGRKP - 508 - XXP - XXXX - XX - X - X
产品型号 间距 颜色 板数 01常规颜色
灰色:GY 橙色:OE 02-99: A-Z其他定制
蓝色:BU 红色:RD 定制颜色 0-Y一字螺丝
黑色:BK 透明色:TT 1-S十字螺丝
绿色:GN 黄色:YW Fe铁方块 2-PS平头十字螺丝
白色:WE

Pitch Range In mm	Nominal Dimension In mm	Range	Symbol					
Over 6 TO	Over 10 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO	Over 150 TO	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			MX2EDGRKP-5.08-XXP		
MAIXU 慈溪市迈旭电子有限公司			DWGNO.		