

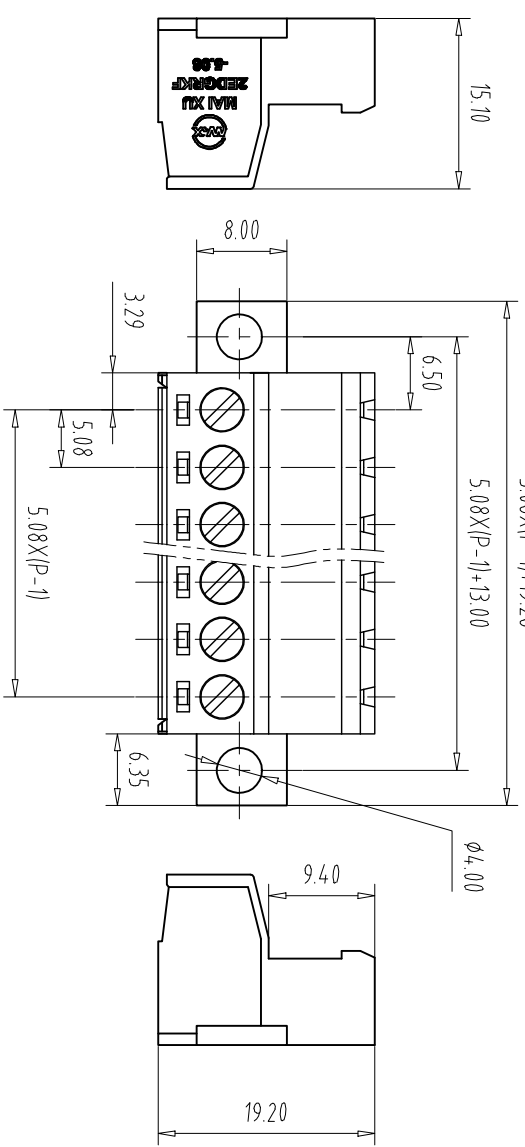


注: 本资料禁止传输、复制、编辑或存档, 以及用其内容进行复制或

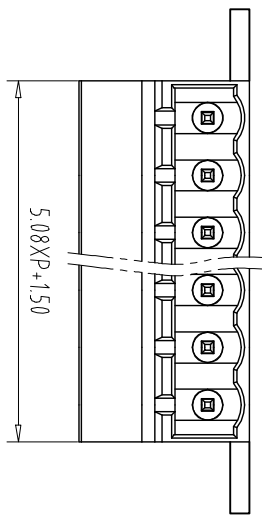

REV	ECN NO.	CONTENT	CHK	DATE

NOTES:

1	Use group	B	C	D
	Rated Current	15A	/	10A
	Rated Voltage	300V	/	300V

- 3 Torque value: M2.5, 3.54Lb.in
- 4 Wire range: 28~12AWG

IEC Standard				
1 Pollution Degree	3	2	2	2
Overvoltage Category	III	III	II	II
Rate Impulse Voltage(KV)	/	/	4.0KV	/
Rate Voltage(V)	/	/	320V	/
Rate Current(A)	/	/	15A	/

- 2 Torque value: M2.5, 0.4Nm
- 3 wire range: 0.2~2.5mm²

NOTES2:


- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Conductor: Copper alloy (Sn Plated)
- 5.Screw: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Stripping length: 7-8mm
- 3.Operating Temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX2EDGRKF - 508 - XXP - XXXX - XX - X - X

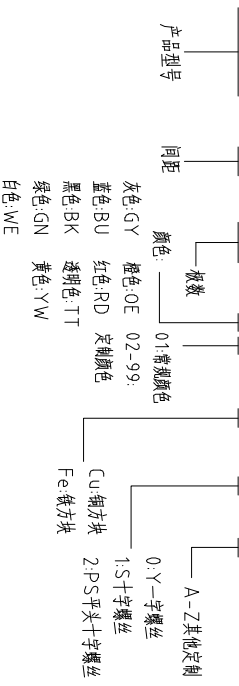

Pitch Range In mm		Nominal Dimension Range In mm	
Over 6	Over 10	Over 30	Over 60
TO 6	TO 10	TO 30	TO 60
Over 10	Over 24	Over 60	Over 100
TO 10	TO 24	TO 60	TO 100
Over 150	Over 150	Over 150	Over 150
TO 150	TO 150	TO 150	TO 150

—	∩	□
---	---	---

0.1/10

±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	MM	SHEET/OF
APP.	DATE	DATE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			MX2EDGRKF-5.08-XXP		
慈溪市迈旭电子有限公司			DWGNO.		