
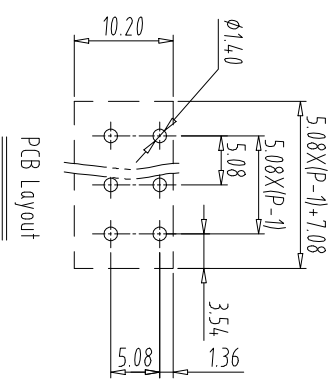
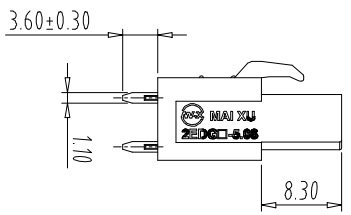
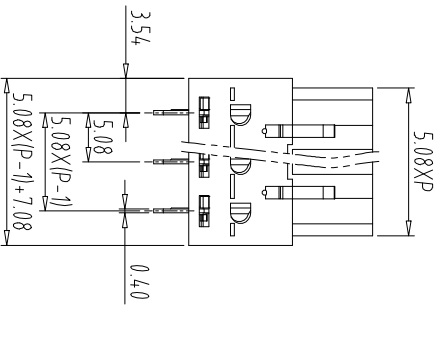



注: 本资料禁止传输、复制、编辑或文档, 以及利用其内容进行印刷

REV	ECN NO.	CONTENT	CHK	DATE



NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	320V	320V	630V
Rate Current(A)	12A	12A	12A

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Clamp: Copper alloy (Sn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance

How to order

MX2EDGB - 508 - XXP - XXXX - XX - X

产品型号 间距 颜色: 极数: 01: 常规颜色 A-2其他定制

灰色:GY 棕色:OE 02-99:
 蓝色:BU 红色:RD 定制颜色
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW
 白色:WE

Cu:铜 Fe:铁

Pitch Range In mm	Nominal Dimension Range In mm				
	Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF 1/1
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD		MX2EDGB-5.08-XXP			
慈溪市迈旭电子有限公司		DWGNO.			