

注: 本资料禁止传输、复制、编辑、修改, 以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

NOTES2:

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(kV)	/	4.0kV	/
Rate Voltage(V)	/	400V	/
Rate Current(A)	/	15A	/

NOTES3:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Clamp: Copper alloy (Ni Plated)
- 5.Screw: Steel (M2.5, Zn Plated)

How to order

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	23.06.20	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 / 1/1
APP.	DATE	NAME	MX2EDGK-7.62-XXP		

1. Torque value: M2.5, 0.4Nm
2. Torque value: M2.5, 3.54Lb.in
3. Wire range: 28~12AWG

IEC Standard

UL Standard

1. Pitch: 7.62mm Poles: 02-24P

2. Stripping length: 7-8mm

3. Operating temperature: -40℃~+105℃

4. RoHS Compliance

颜色: 01: 轴颜色
0: Y-一字螺丝
A-Z其他定制

颜色: 0E: 02-99: 1: S十字螺丝
2: P.S平头十字螺丝

颜色: GN: 绿色
黄色: YW
白色: WE

颜色: BU: 蓝色
透明: TT
黑色: BK

颜色: GY: 灰色
红色: RD
透明: TT

颜色: OE: 02-99: 1: S十字螺丝
2: P.S平头十字螺丝

颜色: YW: 黄色
白色: WE

颜色: BK: 黑色
透明: TT

颜色: GN: 绿色
黄色: YW
白色: WE

颜色: BU: 蓝色
透明: TT
黑色: BK

颜色: GY: 灰色
红色: RD
透明: TT

颜色: OE: 02-99: 1: S十字螺丝
2: P.S平头十字螺丝

颜色: YW: 黄色
白色: WE

颜色: BK: 黑色
透明: TT





颜色: GN: 绿色
黄色: YW
白色: WE

颜色: BU: 蓝色
透明: TT
黑色: BK

颜色: GY: 灰色
红色: RD
透明: TT

颜色: OE: 02-99: 1: S十字螺丝
2: P.S平头十字螺丝

颜色: YW: 黄色
白色: WE

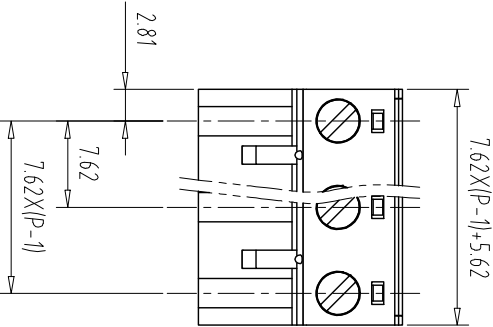

Pitch Range In mm	Nominal Dimension In mm	Range
Over 6 TO	Over 10 TO	Over 30 TO
Over 10 TO	Over 24 TO	Over 30 TO
Over 30 TO	Over 60 TO	Over 100 TO
Over 60 TO	Over 100 TO	Over 150 TO
Over 100 TO	Over 150 TO	Over 150 TO

Range	±2°
Over 150 TO	0.1/10
Over 150 TO	≤

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	23.06.20	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 / 1/1
APP.	DATE	NAME	MX2EDGK-7.62-XXP		