
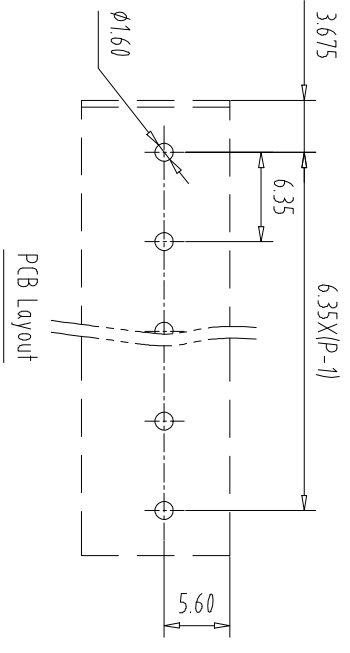
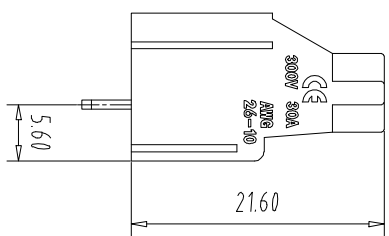
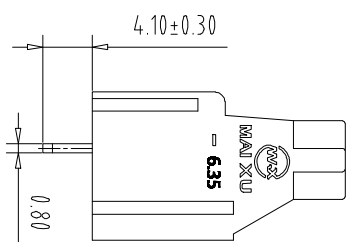


注: 本图禁止传输、复制、编辑、修改, 以及用其内容建立文档

REV	ECN NO.	CONTENT	CHK	DATE

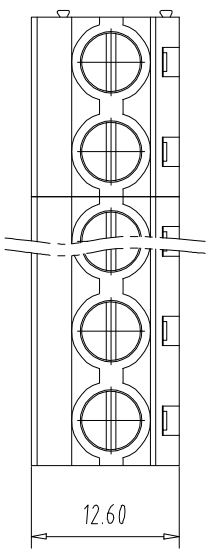


NOTES1:
UL Standard
1.Rating voltage/current: 300V/30A
2.withstanding voltage: AC2500V/1Min
3.Torque value: M3, 4.43Lb.in
4.Wire range: 26~10AWG

IEC Standard
1.1.Rating voltage/current: 450V/32A
2. Torque value: M3, 0.5Nm
3.wire range: 15~4.0mm²

NOTES2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Copper alloy(Sn Plated)
3.Cage: Brass(Ni Plated)
4.Screw: Steel(M3,Zn Plated)

NOTES3:
1.Pitch: 6.35mm Poles: 02-24P
2.Stripping length: 7-8mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

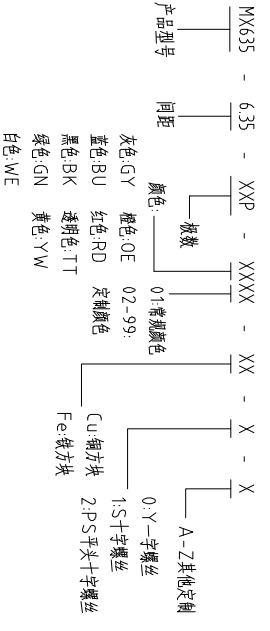

Pitch Range In mm	Nominal Dimension In mm	Range
Over 6	Over 10	Over 30
TO 6	TO 10	TO 30
Over 10	Over 24	Over 60
TO 10	TO 24	TO 60
Over 150	Over 150	Over 150
TO 150	TO 150	TO 150

Nominal Dimension Range	Range
±0.15	±0.20
±0.20	±0.30
±0.30	±0.50
±0.50	±0.70
±0.70	±1.00
±1.00	±1.30
±2°	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	UNITS	MM	1/1
APP.	DATE	SCALE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.					NAME
MAIXU 慈溪市迈旭电子有限公司					MX635-6.35-XXP
DWGNO.					