
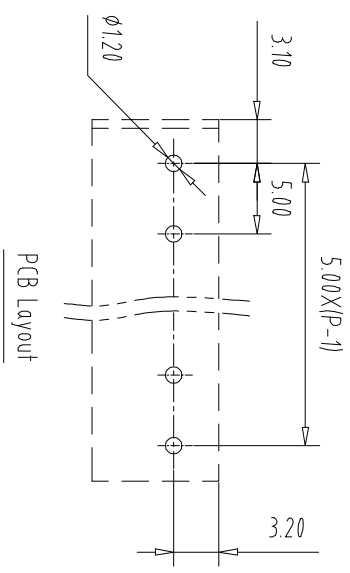
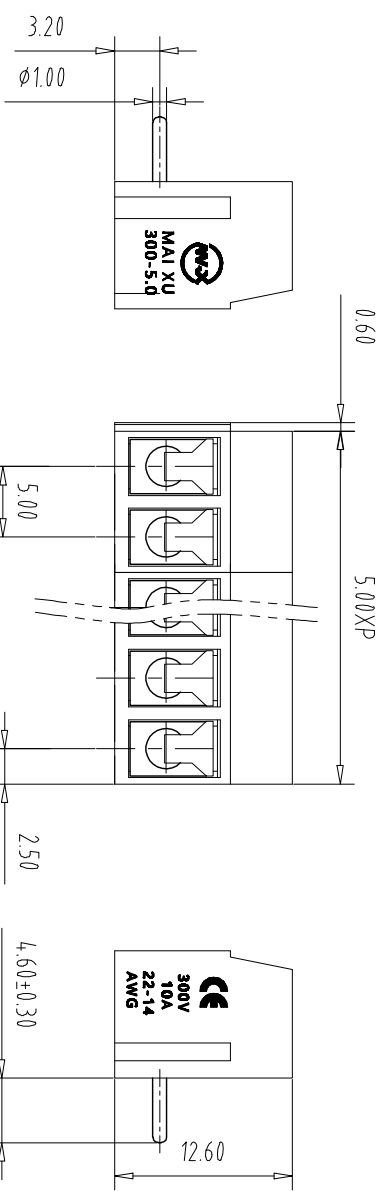


注: 本图只作禁止传输、复制、编辑被控文件, 以及附具内容使用

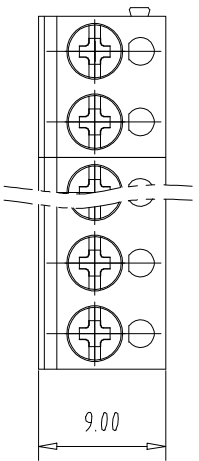

REV	ECN NO.	CONTENT	CHK	DATE


- NOTES1:
- UL Standard
- 1.Rating voltage/current: 300V/10A
 - 2.withstanding voltage: AC2000V/1Min
 - 3.Torque value: M3, 4,4.3Lb.in
 - 4.Wire range: 22~14AWG
- IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	15A	/

1. Torque value: M3, 0.5Nm
2. Torque value: 10-2.5mm²
3. wire range: 10-2.5mm²

- NOTES2:
- 1.Housing: PA66(UL94V-0)
 - 2.Solder Pin: Copper alloy(Sn Plated)
 - 3.Spring: Stainless Steel
 - 4.Screw: Steel(M3,Zn Plated)

- NOTES3:
- 1.Pitch: 5.0mm Poles: 02-24P
 - 2.Stripping length: 5-6mm
 - 3.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance

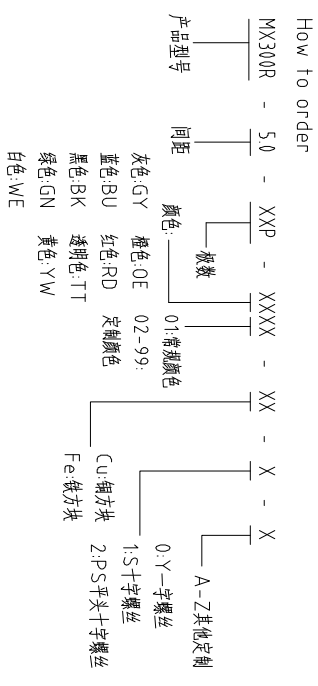

Pitch Range In mm	Nominal Dimension Range In mm						PCB layout	
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150	±2°
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	0.1/10	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	SHEET/OF	1/1
APP.	DATE	DATE	SCALE	A4	
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司				NAME	MX300R-5.0-XXP
				DWGNO.	