

注: 本资料禁止传输、复制、编辑、修改, 以及用其内容进行建设性交流

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard	Use group	B	C	D
Rated Current	7A	/	10A	
Rated Voltage	300V	/	300V	

1. Torque value: M2, 1.77Lbin

2. Torque value: M2, 1.77Lbin

3. Wire range: 24-18AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(kV)	2.5kV	2.5kV	2.5kV
Rate Voltage(V)	160V	250V	320V
Rate Current(A)	10A	10A	10A

2. Torque value: M2, 0.2Nm







NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Solder Pin: Copper alloy(Sn Plated)
- 3.Spring: Stainless Steel
- 4.Screw: Steel(M2,Zn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: 5-6mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

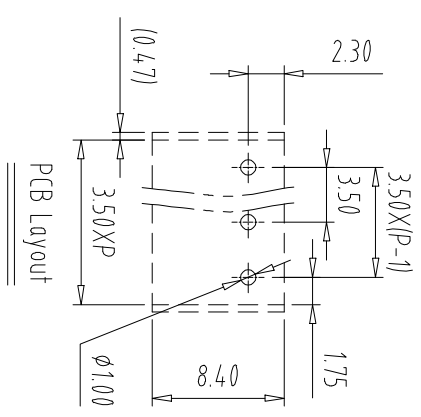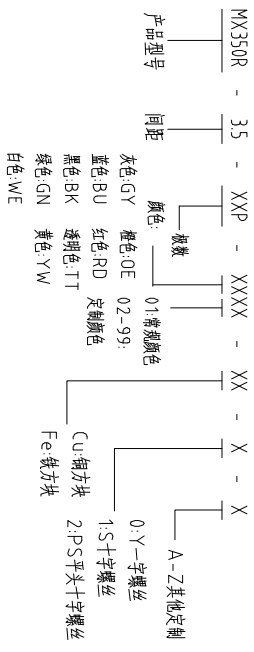

Pitch Range In mm	Nominal Dimension In mm	Range
Over 6 TO	Over 10 TO	Over 30 TO
Over 10 TO	Over 24 TO	Over 30 TO
Over 10 TO	Over 60 TO	Over 100 TO
Over 10 TO	Over 100 TO	Over 150 TO
Over 150 TO		

±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
±2°							

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	23.09.05	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	A4 / 1/1
APP	DATE	NAME			
CIXI MAIXU ELECTRONICS CO.,LTD. 慈溪市迈旭电子有限公司 DWGNO.					
MX350R-3.5-XXP					