
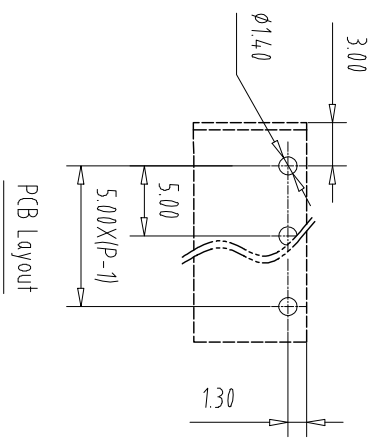

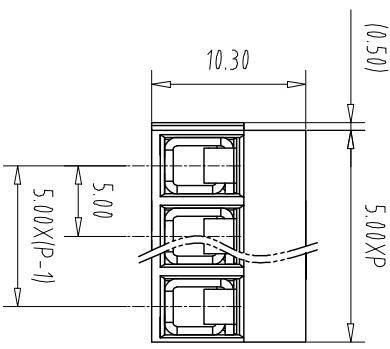



注: 本型为深基绝缘、复绕、端接式结构, 以及用特殊漆包线绕



Pitch Range In mm		Nominal Dimension In mm		Nominal Dimension Range		Tolerance	
Over 6	Over 10	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

REV	ECN NO.	CONTENT	CHK	DATE

NOTES 1:  
 UL Standard  
 1. Rating voltage/current: 300V/10A  
 2. withstanding voltage: AC1500V/1Min  
 3. Torque value: M2.5, 3.54Lbin  
 4. Wire range: 26~14AWG  
 IEC Standard

Pollution Degree	Overvoltage Category	Rate Impulse Voltage(kV)	Rate Voltage(V)	Rate Current(A)
3	III	/	250V	/
2	II	/	/	10A

NOTES 2:  
 1. Housing: PA66(UL94V-0)  
 2. Solder Pin: Copper alloy(Sn Plated)  
 3. Spring: Stainless Steel  
 4. Screw: Steel(M2.5, Zn Plated)

NOTES 3:  
 1. Pitch: 5.0mm Poles: 02-24P  
 2. Stripping length: 6-7mm  
 3. Operating temperature: -40℃~+105℃  
 4. RoHS Compliance

How to order  
 MX126R - 5.0 - XXP - XXXX - XX - X - X  
 产品型号 间距 颜色 极数 01:常规颜色  
 灰色:GY 棕色:OE 02-99:  
 蓝色:BU 红色:RD 定制颜色  
 黑色:BK 透明色:TT  
 绿色:GN 黄色:YW  
 白色:WE

A-Z其他定制  
 0-Y一字螺丝  
 1:S十字螺丝  
 2:P.S平头十字螺丝  
 Cu:铜方块  
 Fe:铁方块

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	SCALE	MM	1/1
APP.	DATE	SCALE	A4	1:1	1/1
CIXI MAIXU ELECTRONICS CO.,LTD.			MX126R-5.0-XXP		
慈溪市迈旭电子有限公司			DWGNO.		