
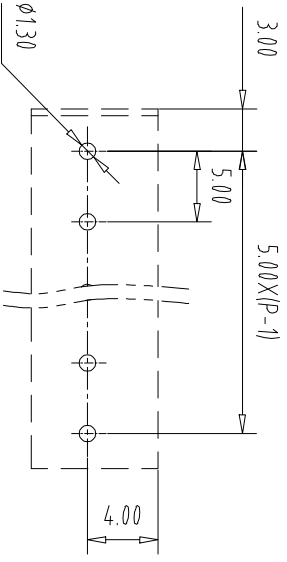

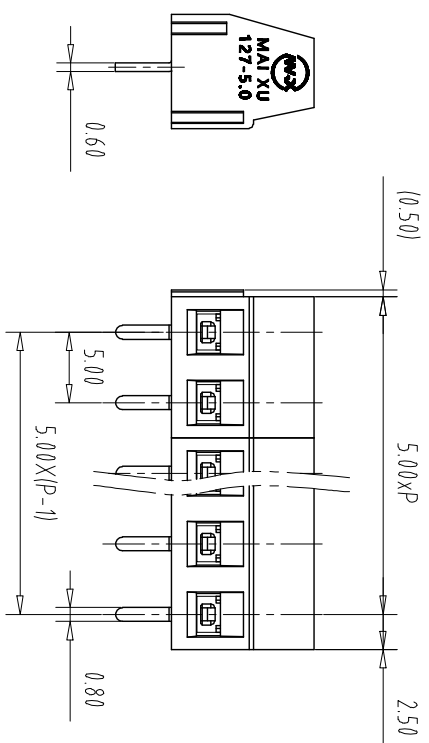


注: 本型号禁止传输、复制、编辑、修改, 以及用其内容建设数据库

REV	ECN NO.	CONTENT	CHK	DATE

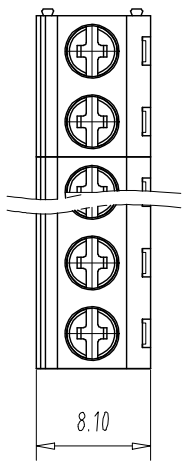

PCB Layout

Pitch Range In mm	Nominal Dimension Range In mm					Pitch Range In mm	
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

NOTES 1:  
UL Standard  
1.Rating voltage/current: 300V//10A  
2.withstanding voltage: AC2000V//1Min  
3.Torque value: M2.5, 3.54Lb.in  
4.Wire range: 26~14AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	15A	/

1. Torque value: M2.5, 0.4Nm
2. Torque value: M2.5, 0.4Nm
3. wire range: 0.75-1.5mm<sup>2</sup>


NOTES 2:

- 1.Housing: PA66(UL94V-0)
- 2.Cage: Brass(Ni Plated)
- 3.Solder Pin: Copper alloy(Sn Plated)
- 4.Screw: Steel(M2.5,Zn Plated)

NOTES 3:

- 1.Pitch: 5.0mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

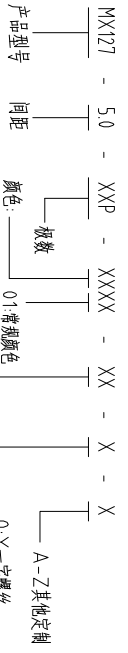

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	DATE	UNITS	SHEET/OF
APP	DATE	SCALE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD			NAME	MX127-5.0-XXP	
MAIXU 慈溪市迈旭电子有限公司			NAME	MX127-5.0-XXP	